
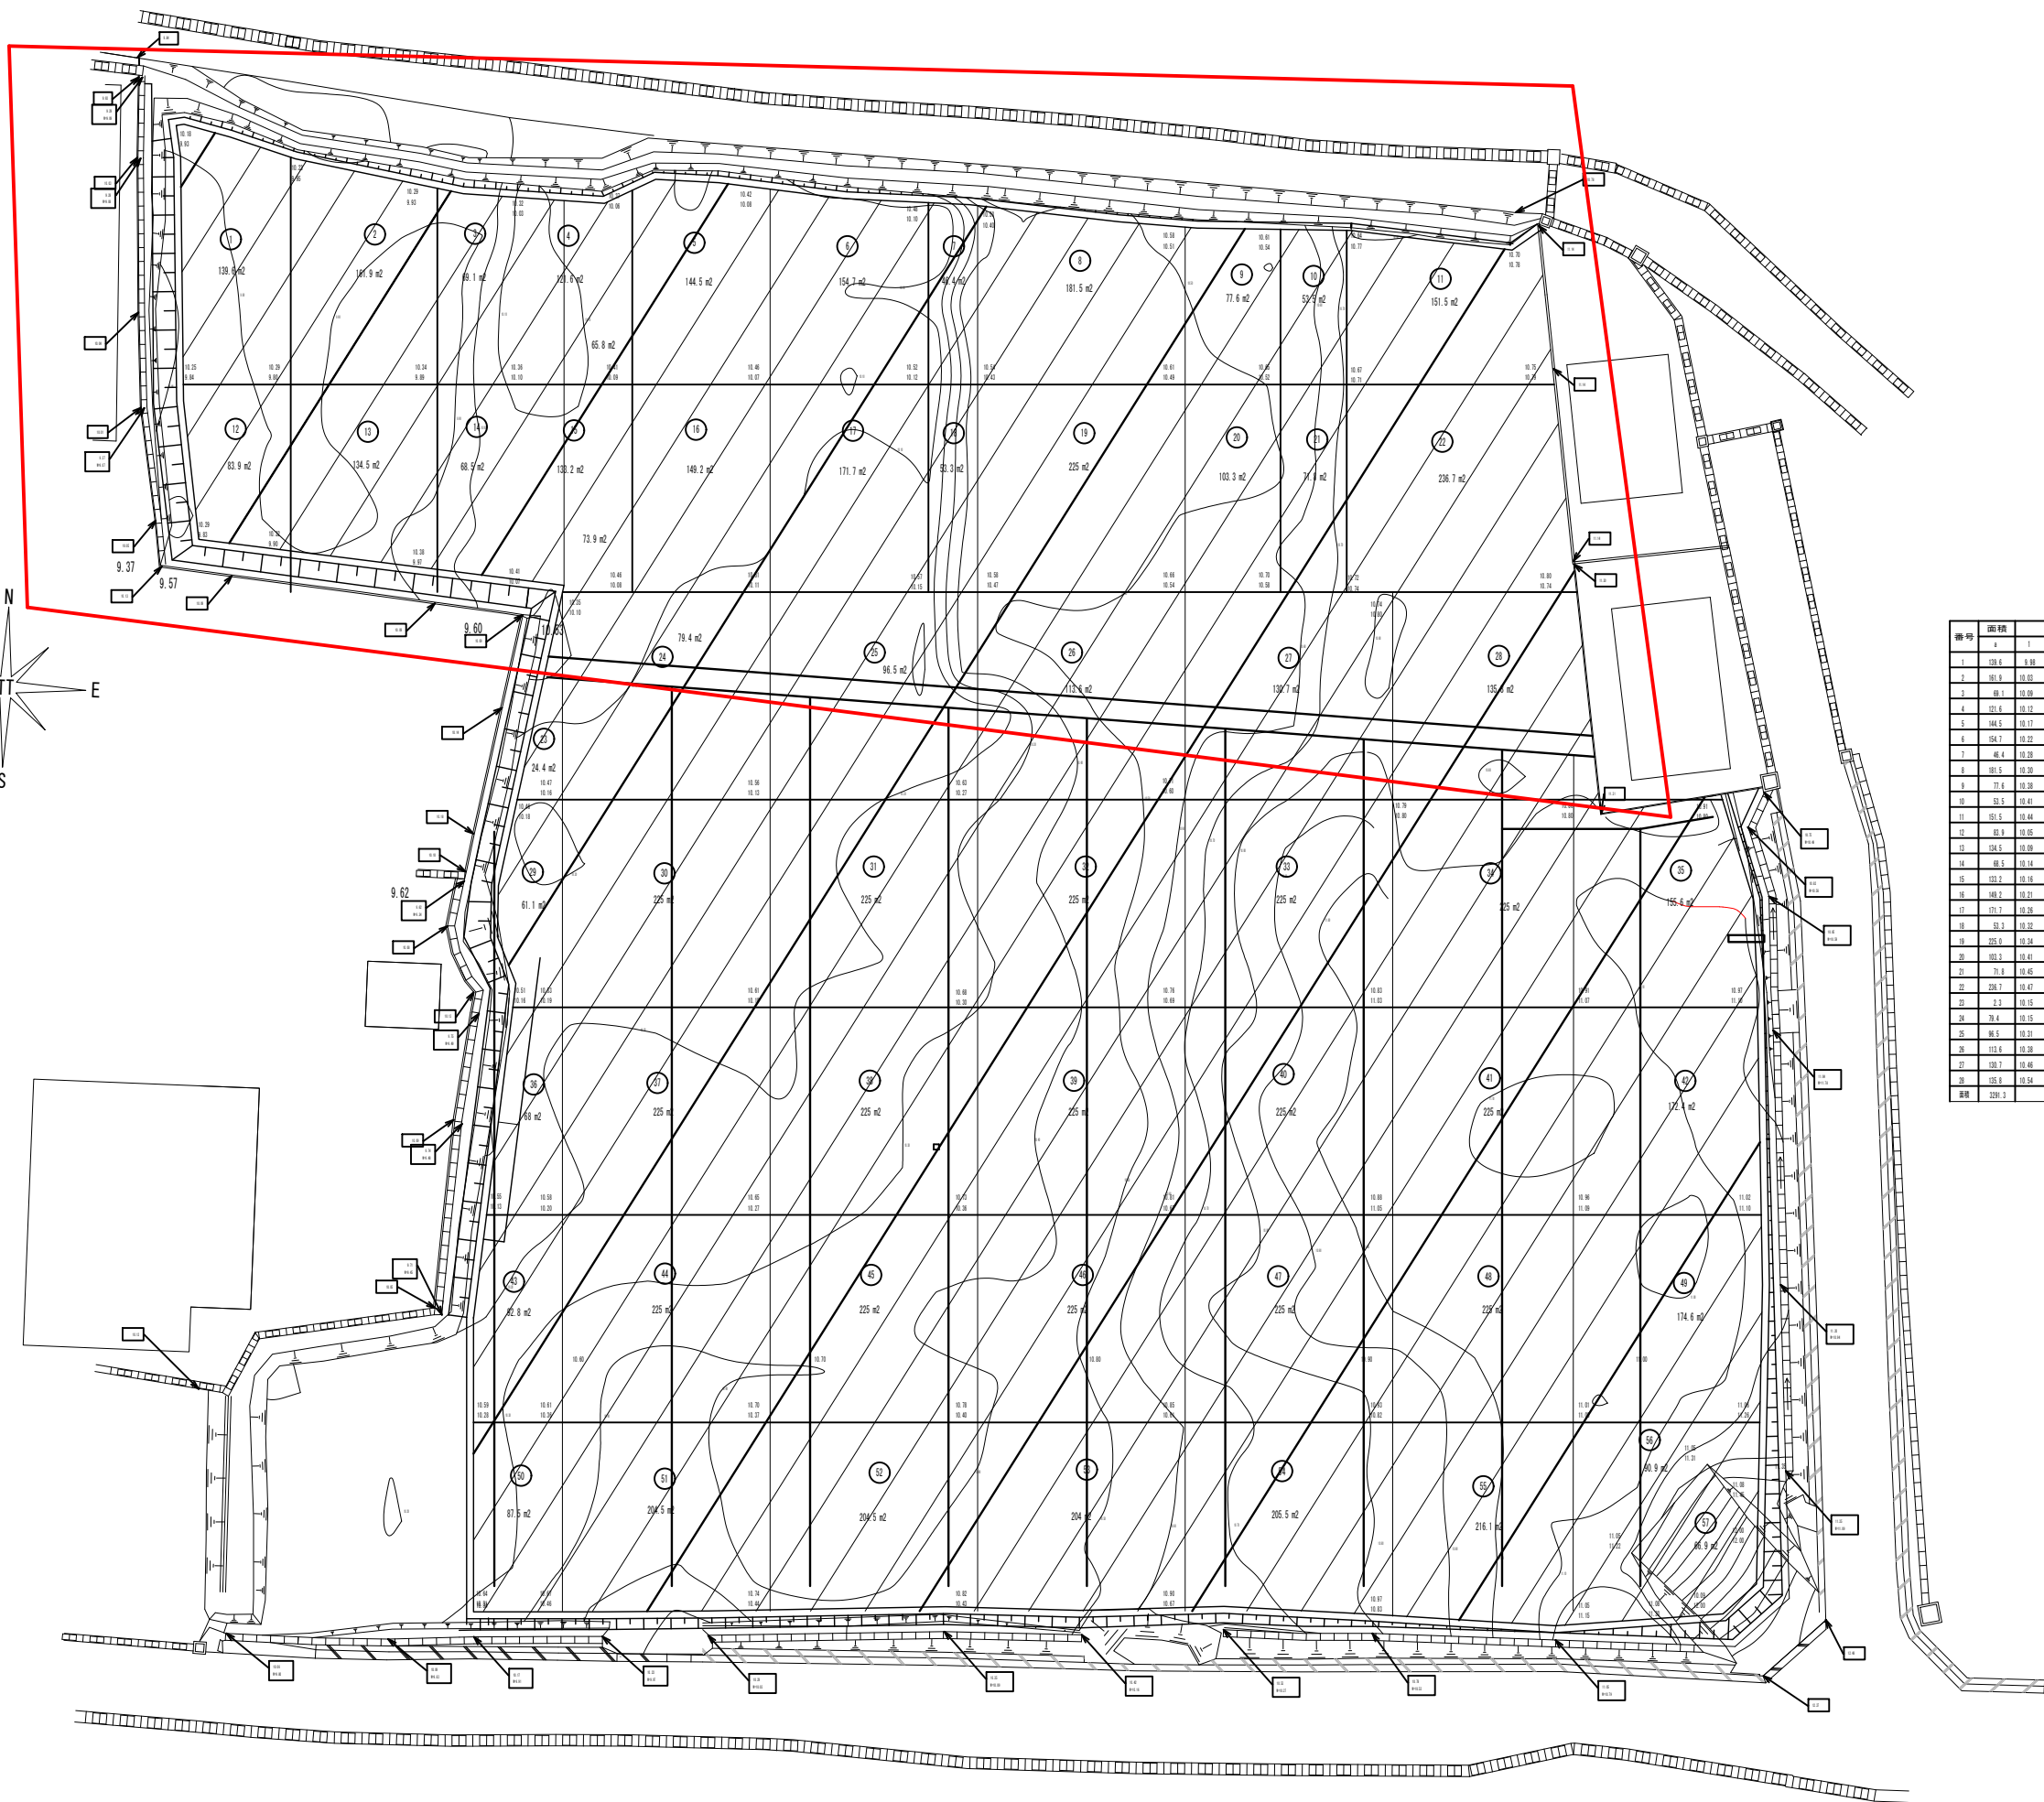




番号	面積	基準計画高					傾斜	平均高	地盤高					平均高	平均差	体積	盛土	切土
		1	2	3	4	5			1	2	3	4	5					
1	139.6	8.88	10.01	10.09	10.05		4	10.02	8.88	8.85	8.88	8.88		8.88	-0.19	22.06		
2	161.9	10.01	10.09	10.14	10.09		4	10.09	8.85	8.82	8.89	8.89		8.89	-0.16	31.57		
3	68.1	10.09	10.17	10.16	10.14		4	10.13	8.89	8.82	8.82	8.89		8.88	-0.16	9.87		
4	171.6	10.17	10.17	10.17	10.16		4	10.16	10.02	10.06	10.06	10.06		10.05	-0.06	11.55		
5	144.5	10.17	10.22	10.28	10.27		4	10.22	10.06	10.06	10.07	10.06		10.05	-0.16	26.85		
6	156.7	10.22	10.28	10.32	10.32		4	10.25	10.06	10.10	10.12	10.07		10.09	-0.16	28.31		
7	46.4	10.28	10.38	10.34	10.32		4	10.32	10.10	10.40	10.42	10.12		10.30	-0.08	7.23		
8	101.5	10.38	10.38	10.41	10.39		4	10.38	10.40	10.37	10.40	10.40		10.40	-0.02	-18.15		-18.15
9	77.4	10.38	10.41	10.45	10.41		4	10.42	10.32	10.34	10.32	10.40		10.35	-0.10	-7.82		-7.82
10	52.5	10.41	10.44	10.47	10.45		4	10.44	10.34	10.37	10.37	10.32		10.35	-0.10	-10.27		-10.27
11	191.5	10.44	10.54	10.55	10.47		4	10.49	10.37	10.39	10.39	10.37		10.38	-0.12	-41.21		-41.21
12	62.4	10.54	10.55	10.57	10.59		4	10.58	8.84	8.88	8.88	8.88		8.84	-0.26	20.56		
13	156.5	10.59	10.14	10.18	10.12		4	10.12	8.88	8.88	8.87	8.89		8.88	-0.26	32.68		
14	68.5	10.14	10.16	10.21	10.18		4	10.17	8.88	10.10	10.07	8.87		10.08	-0.16	11.30		
15	112.2	10.16	10.21	10.28	10.27		4	10.22	10.10	10.09	10.09	10.07		10.06	-0.16	16.45		
16	140.2	10.21	10.28	10.31	10.38		4	10.28	10.09	10.07	10.11	10.08		10.08	-0.12	25.81		
17	171.7	10.28	10.32	10.37	10.32		4	10.33	10.07	10.12	10.15	10.11		10.13	-0.20	34.86		
18	52.2	10.32	10.34	10.38	10.37		4	10.33	10.12	10.43	10.47	10.15		10.30	-0.08	3.20		
19	255.0	10.34	10.41	10.46	10.38		4	10.38	10.42	10.40	10.34	10.47		10.40	-0.06	-19.12		-19.12
20	102.2	10.41	10.45	10.50	10.46		4	10.46	10.40	10.52	10.54	10.34		10.52	-0.07	-7.85		-7.85
21	71.4	10.45	10.47	10.52	10.50		4	10.48	10.52	10.71	10.74	10.59		10.68	-0.13	-10.91		-10.91
22	256.7	10.47	10.55	10.60	10.52		4	10.55	10.71	10.70	10.74	10.74		10.76	-0.21	-49.71		-49.71
23	2.3	10.15	10.27	10.26			2	10.22	10.10	10.16	10.19			10.17	-0.08	0.18		0.18
24	78.4	10.15	10.31	10.36	10.27		4	10.23	10.10	10.11	10.12	10.14		10.15	-0.14	11.75		11.75
25	86.5	10.31	10.38	10.42	10.38		4	10.39	10.11	10.47	10.27	10.13		10.36	-0.15	12.88		12.88
26	112.6	10.38	10.46	10.51	10.42		4	10.46	10.47	10.54	10.49	10.27		10.49	-0.05	-2.84		-2.84
27	150.7	10.46	10.54	10.59	10.51		4	10.55	10.54	10.60	10.60	10.60		10.60	-0.14	-20.91		-20.91
28	155.8	10.54	10.60	10.56	10.59		4	10.53	10.60	10.74	10.69	10.69		10.76	-0.22	-28.79		-28.79
計	3281.3															285.38		-217.78

令和 8 年 度	
業 務 名	輪島仮設グラウンド整備
工 事 名	
業務箇所	輪島市杉平町蝦夷穴 地内
図 名	土量計算
縮 尺	1/500
図面番号	／ 枚の内
輪 島 市	